

Code ST06	Project E07-A	Release A	TECHNICAL DATASHEET
---------------------	-------------------------	---------------------	----------------------------

ABSOLUTE OPTICAL ENCODER AEN600 (Parallel)

GENERAL FEATURES

- Absolute optical encoder (singleturn or multiturn).
- Output protocol: **Parallel (Gray or Binary)**.
- Aluminium flange and housing.
- Axial or radial output with connector or sealed cable exit.



MECHANICAL AND ELECTRICAL CHARACTERISTICS

MECHANICAL <ul style="list-style-type: none"> • Square flange, with centering Ø 31.75 mm. • Aluminium housing. • Stainless steel shaft. • Ball bearings with special high-sealed screens. • High protection even in harsh environmental conditions. ELECTRICAL <ul style="list-style-type: none"> • Diagnostic LED. • Input (direction). • Output data: status, preset. 	Cod. AEN600	
	Resolution	10-14 Bit Singleturn 4-8-12 Bit Multiturn
	Max. rotating speed	continuous 10000 rpm momentary 12000 rpm
	Max. shaft load	40 N (axial) - 60 N (radial)
	Shaft diameter (mm)	Ø 9.52 – Ø 10
	Operating temperature	-40 °C ÷ 100 °C
	Storage temperature	-40 °C ÷ 85 °C
	Vibration resistance (EN 60068-2-6)	100 m/s ² (10 ÷ 2000 Hz)
	Shock resistance (EN 60068-2-27)	1000 m/s ² (6 ms)
	Protection class (EN 60529)	IP 64 standard IP 67 optional
	Torque	0.01 Ncm
	Moment of inertia	3.8 x 10 ⁻⁶ kgm ²
	Power supply	10 ÷ 30 V ± 10%
	Current consumption	200 mA (SG), 300 mA (MG)
	Protocol	Parallel
Output code	Binary, Gray	
Electrical connections	see related table	
Weight	350 g (SG), 400 g (MG)	

ORDERING CODE

MODEL	TYPE / OUTPUT	RESOL. Bit (MG)	RESOL. Bit (SG)	POWER SUPPLY	Ø SHAFT	CABLE / CONNECTOR	SIGNAL	CONNECTION	OPTIONS
AEN600	M R	08	12 *	1030	D10	M01	PB	C	V2

S = singleturn	00 = if SG	10 = 10 Bit	1030 = 10÷30 V	952 = ø9.52 mm	Mnn = cable length in m	PB = Parallel Binary	C = cable	No cod. = standard
M = multiturn	04 = 4 Bit	12 = 12 Bit		D10 = ø10 mm	CQ = M23 17 Pin	PG = Parallel Gray	n = connection number	V2 = IP 67
R = radial	08 = 8 Bit	13 = 13 Bit						
A = axial	12 = 12 Bit	14 = 14 Bit						
		0360 = 360 increment SG						
		0720 = 720 increment SG						

* If the encoder is Multiturn, the possible resolution SG can be only 12 Bit.

Example **ABSOLUTE OPTICAL ENCODER AEN600 MR 0812 1030 D10 M01 PB C V2**


Code ST06	Project E07-A	Release A	TECHNICAL DATASHEET
---------------------	-------------------------	---------------------	----------------------------

CABLE AND ELECTRICAL CONNECTIONS

SINGLETURN, CABLE OUTPUT					
Color	9 Bit / 360 inc.	10 Bit / 720 inc.	12 Bit	13 Bit	14 Bit
Grey/Pink	n.c.	n.c.	n.c.	n.c.	S0 (LSB)
Brown/Yellow	n.c.	n.c.	n.c.	S0 (LSB)	S1
Brown/Grey	n.c.	n.c.	S0 (LSB)	S1	S2
Red/Blue	n.c.	n.c.	S1	S2	S3
Violet	n.c.	S0 (LSB)	S2	S3	S4
White/Brown	S0 (LSB)	S1	S3	S4	S5
White/Green	S1	S2	S4	S5	S6
White/Yellow	S2	S3	S5	S6	S7
White/Grey	S3	S4	S6	S7	S8
White/Pink	S4	S5	S7	S8	S9
White/Blue	S5	S6	S8	S9	S10
White/Red	S6	S7	S9	S10	S11
White/Black	S7	S8	S10	S11	S12
Brown/Green	S8 (MSB)	S9 (MSB)	S11 (MSB)	S12 (MSB)	S13 (MSB)
Yellow	Tristate S0 + S8	Tristate S0 + S9	Tristate S0 + S11	Tristate S0 + S12	Tristate S0 + S13
Pink	Latch	Latch	Latch	Latch	Latch
Green	Direction	Direction	Direction	Direction	Direction
Black	0 V	0 V	0 V	0 V	0 V
Red	+ V	+ V	+ V	+ V	+ V
Brown	Alarm	Alarm	Alarm	Alarm	Alarm

SINGLETURN, CONNECTOR M23 (17 Pin)					
Pin	9 Bit / 360 inc.	10 Bit / 720 inc.	12 Bit	13 Bit	14 Bit
1	S0 (LSB)	S0 (LSB)	S0 (LSB)	S12 (MSB)	S13 (MSB)
2	S1	S1	S1	S11	S12
3	S2	S2	S2	S10	S11
4	S3	S3	S3	S9	S10
5	S4	S4	S4	S8	S9
6	S5	S5	S5	S7	S8
7	S6	S6	S6	S6	S7
8	S7	S7	S7	S5	S6
9	S8 (MSB)	S8	S8	S4	S5
10	n.c.	S9 (MSB)	S9	S3	S4
11	n.c.	n.c.	S10	S2	S3
12	Tristate S0 + S8	Tristate S0 + S9	S11 (MSB)	S1	S2
13	Latch	Latch	Latch	S0 (LSB)	S1
14	Direction	Direction	Direction	Direction	S0 (LSB)
15	0 V	0 V	0 V	0 V	0 V
16	+ V	+ V	+ V	+ V	+ V
17	Alarm	Alarm	Alarm	Alarm / Latch	Alarm / Latch

DIMENSIONS

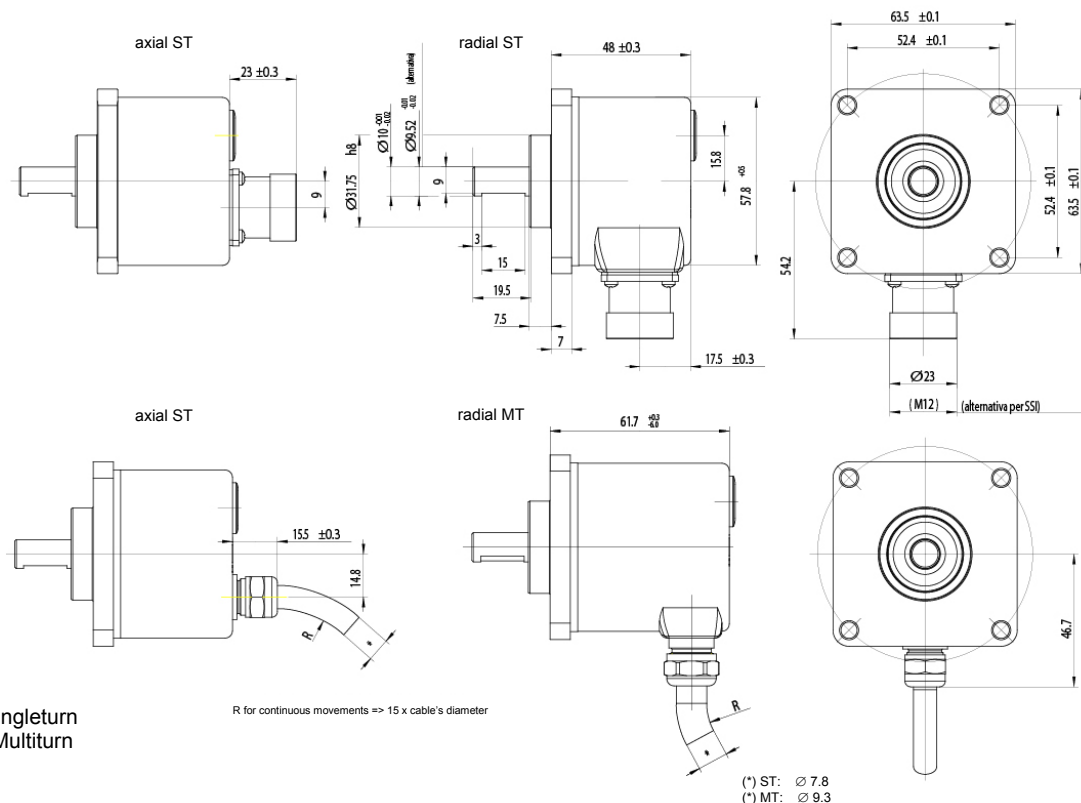

WHAT TO AVOID

- Any mechanical working (cutting, drilling, milling, etc.).
- Any modification of the encoder body or shaft.
- Any improper use, not complying with the technical instructions provided by the Manufacturer.
- External shocks or stresses.

